


## Technical Data

<b>Model</b>	<b>AP 1.2</b>
<b>Design principle</b>	2-way-system
<b>Recommended amplifier output</b>	20 – 150 Watt
<b>Sensitivity</b>	89 dB/W/m
<b>Impedance</b>	4 ohms
<b>Frequency range</b>	50 Hz – 50 kHz
<b>Bass and mid-range speaker</b>	1 x 130 mm MDS
<b>Tweeter</b>	1 x LDR 2642 MKII ribbon
<b>Dimensions (H x W x D)</b>	28 x 19 x 14 cm
<b>Weight</b>	5 kg
<b>Design variants</b>	<p>Cabinet in polished aluminium, loudspeaker cover in silver fabric</p> <p>Cabinet in black anodised aluminium, loudspeaker cover in black fabric</p> <p>Cabinet in white lacquer finish, loudspeaker cover in white fabric</p>



# Example applications

Multi-channel system

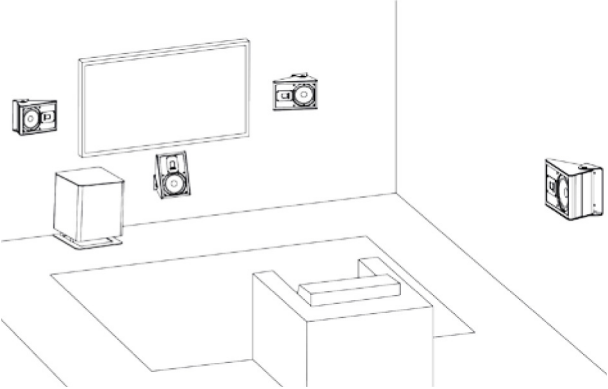

Stereo application



Acoustic irradiation

