
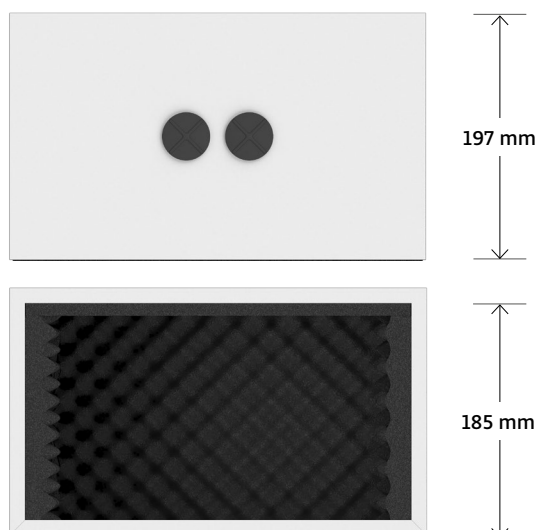
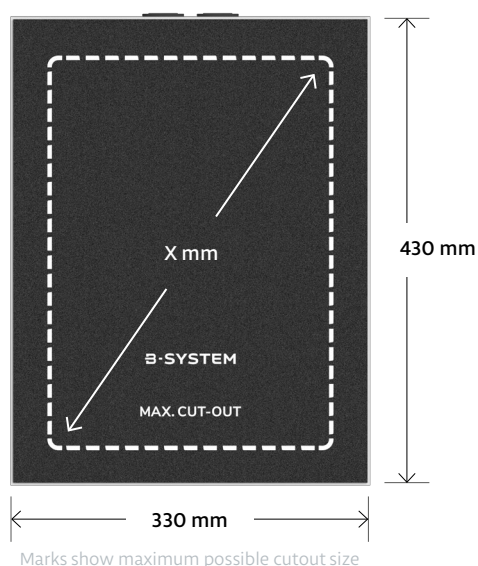


Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

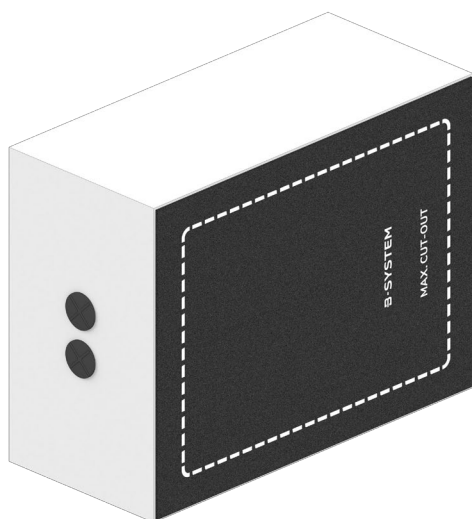


Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout.

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

 All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)

- 1 Dryboxx M made of MDF white, mitered

| Type | Dryboxx M |
|---------------------|---|
| SKU | 1000530 |
| Dimensions | 430 × 330 × 197 mm (L × W × H) |
| Installation depth | 197.5 mm (185+12.5 mm plasterboard) |
| Cut-out dimension X | circular: max. 260 mm square: 330 × 230 mm |
| Internal volume | 21.20 l |
| Pallet unit | 28 pieces |
| Pallet dimensions | 120 × 80 × 190 cm (L × W × H) |



Video installation guide
<https://b-system.com/dryboxx>