
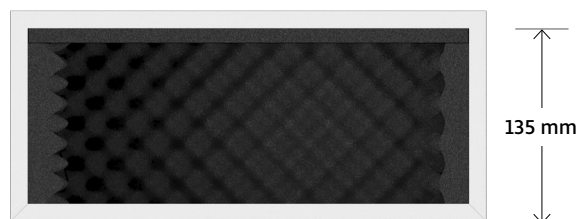
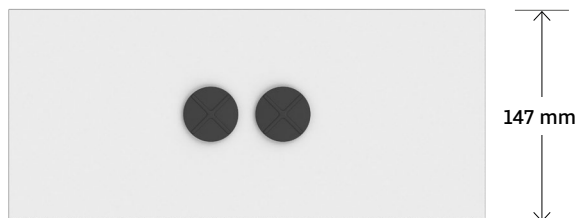
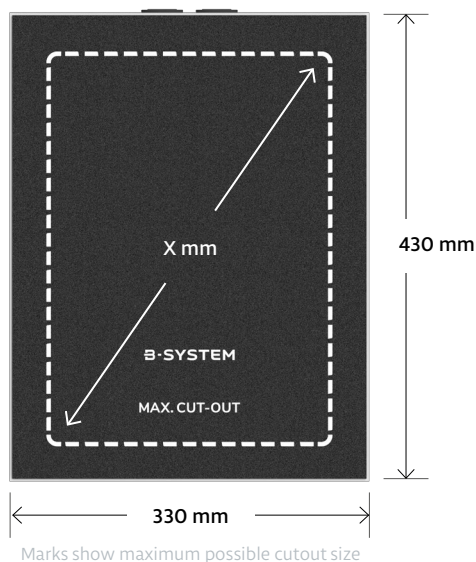


Suitable for installation speakers to develop the full sound quality with an airtight installation backbox.

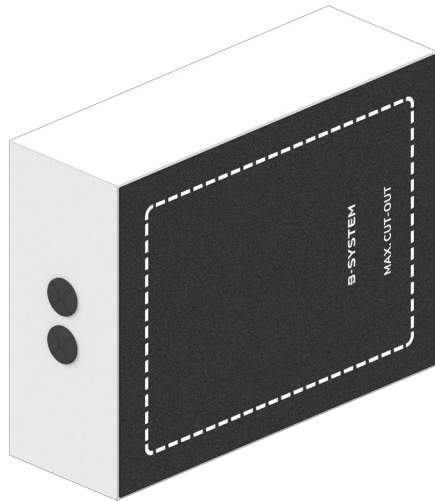

Description

Acoustically optimized installation backbox for drywall and suspended ceilings. Installation backbox consisting of high-quality MDF panels and internal insulation (acoustic dimpled foam) in studio level quality. Ready for installation and easy to mount incl. decoupling mat with printed maximum cutout

Features and benefits

- modular backbox, available in eight standard sizes
- universally suitable for all commercially available in-wall and in-ceiling speakers
- supports the sound quality of installation loudspeakers
- perfect protection against dust, insects and drizzle
- 2 glued-in rubber plugs for cables and ductwork up to 25 mm diameter
- backbox dimension adapted to common drywall grid dimension of 625 mm

i All Dryboxx backboxes are suitable for both in-ceiling and in-wall installation

Scope of delivery (per piece)

- 1 Dryboxx S made of MDF white, mitered

Type	Dryboxx S
SKU	1000520
Dimensions	430 × 330 × 147 mm (L × W × H)
Installation depth	147.5 mm (135+12.5 mm plasterboard)
Cut-out dimension X	circular: max. 260 mm square: 330 × 230 mm
Internal volume	15.00 l
Pallet unit	36 pieces
Pallet dimensions	120 × 80 × 195 cm (L × W × H)



Video installation guide
<https://b-system.com/dryboxx>