

A2S OVERVIEW



A2s Designed for precision and placement flexibility



The A2s is the go-to solution for immersive environments.

- Features one 215mm carbon fiber woofer in a sealed enclosure
- 38mm Teteron tweeter in a custom waveguide for wide dispersion
- Ideal for side, rear, and height channels
- Natively supports on-wall installation and supports multi-positional on-wall and ceilingmount configurations with our incredible V120 tilt/swivel isolation mount Think of the A2s as the Swiss Army knife of surround speakers - an essential component in any serious cinema installation.

 A2s



MODEL A2S - SURROUND SPEAKER

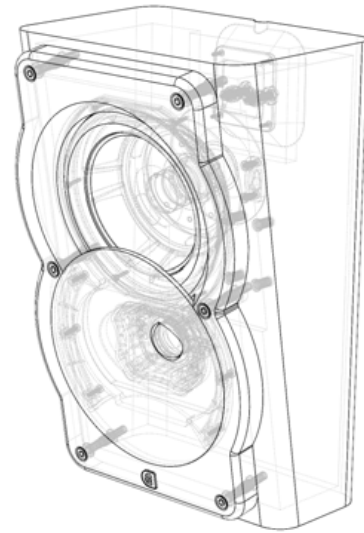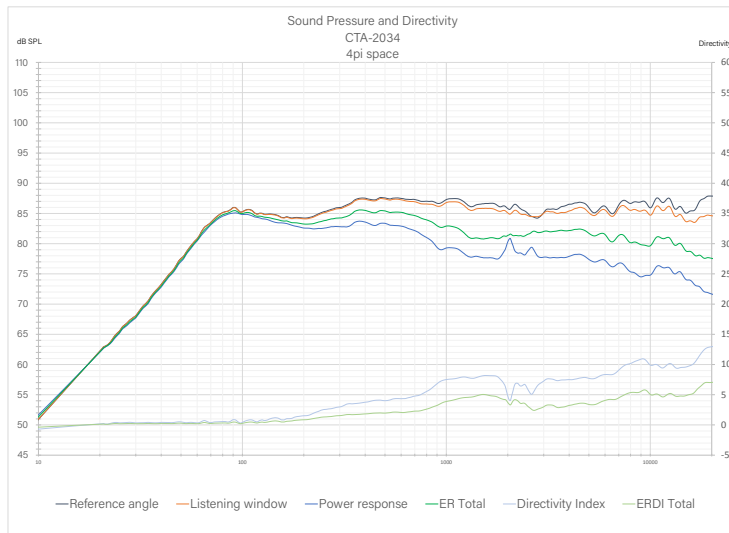

Technical Specifications:

Enclosure Alignment	2-way acoustic suspension
Driver compliment	Tweeter: 35mm, composite Teteron dome Woofers: (1) 215mm, carbon fiber diaphragm
Sensitivity	86.2dB / 2.83v / 1.0m
Impedance	6Ω nominal / 4.5Ω min
Response Linearity	100 - 10kHz +/-2.5dB window
Frequency Response	59 - 30kHz (-6dB) 47 - 33kHz (-10dB)
Typical In Room bass extension	50 Hz (-6dB) 41 Hz (-10dB)
Overall Dimensions	450H x 280W x 221D mm 17.7H x 11.0W x 8.7D inches
Recommended Amplifier Power	50 - 200W
SPL capability @1m (100-20kHz)	109.2dB peak 109.0dB peak <3% 2nd, 3rd Harmonics

