

SONANCE


DSP AMPLIFIER DATA SHEET

DSP 2-750 MKIII

TECHNICAL SPECIFICATIONS

SKU	North America: 93540 International: 93541
UOM	Each
Number of Channels	2 (1 stereo pair)
RMS per Channel @ 8 Ohms	500 watts (2 channels driven)
RMS per Channel @ 4 Ohms	750 watts (2 channels driven)
Peak Bridged @ 8 Ohms	2,000 watts
RMS per Channel @ 70 Volts	750 Watts (2 channels driven)
Frequency Response	5Hz-50kHz, bandwidth limited
Distortion (1kHz) @ 8 Ohms	<0.4%, 500W
Distortion (1kHz) @ 4 Ohms	<0.3%, 500W
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	15A (T15AL - 250V)
Dimensions + Feet (WxHxD)	17.25" x 3.875" x 17.219" (438mm x 98mm x 437mm)
Dimensions + Rack Ears, No Feet (WxHxD)	19" x 3.5" x 17.219" (482mm x 88mm x 437mm)
Rack Space Requirement	2U
Shipping Weight	23.3 lbs. (10.6kg)

DIMENSIONAL DRAWINGS

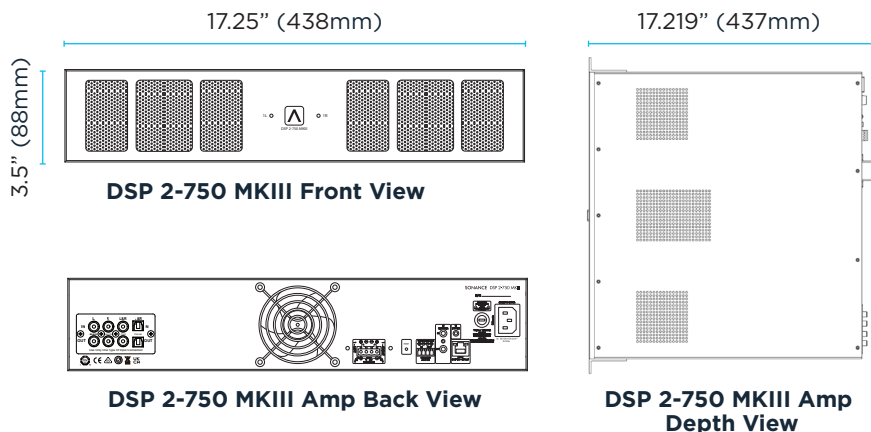

OPTIONAL ACCESSORIES

MODULES AND BRACKETS

MKIII Digital Input Module (DIM)	93594
MKIII Hybrid Input Module (HIM)	93592
MKIII Analog Input Module (AIM)	93593
Rack Mount Bracket	93098

ASSOCIATED PRODUCTS

DSP AMPLIFIERS

DSP 2-150 MKIII	93542
DSP 8-130 MKIII	93538

LIMITED TWO (2) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2025 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • www.sonance.com • 05.05.2025