





Overall Dimensions (unit: mm/inch)

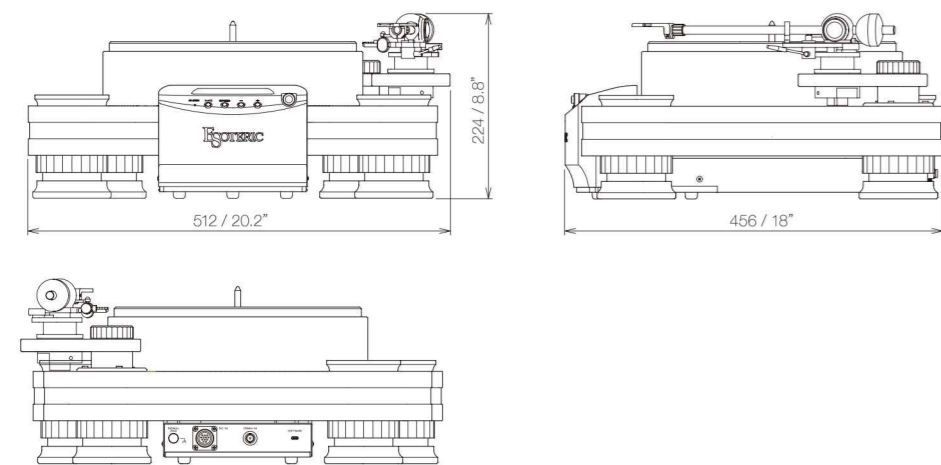

Foot positions (unit: mm/inch)

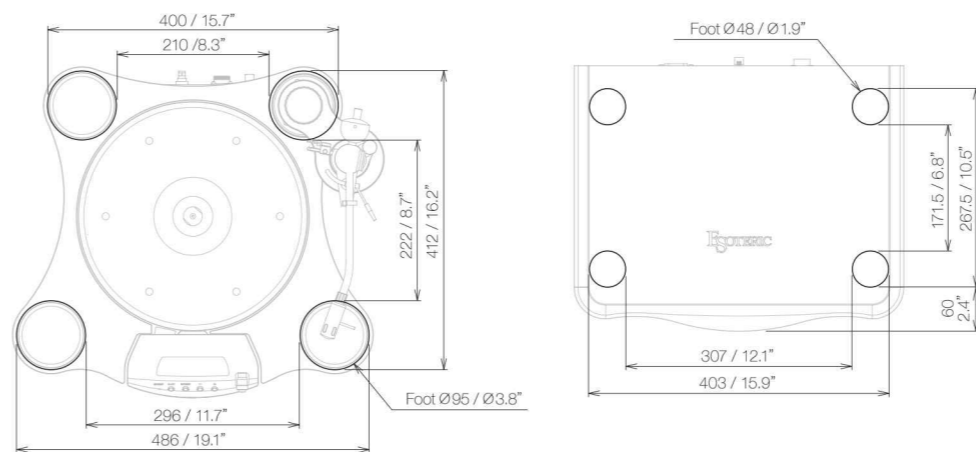

Specifications

Turntable section

Rotation speed:	33 1/3rpm / 45rpm
Rotation speed adjustment range:	±12% (0.1% step)
Wow and flutters:	0.06% or less (W.R.M.S)

Clock input

Connector:	BNCx1
Inout impedance:	50Ω
Input frequency:	10MHz (±10ppm)
Input level:	0.5 to 1.0Vrms (sine wave)

Tonearm section (TA-9D)

Type:	Dynamic balance
Overall length:	326mm
Effective length:	245mm
Distance between tonearm axis to spindle:	230mm
Overhang:	15±2mm
Tracking error:	+2° to 1° 21'
Needle pressure range:	0 to 5g (0.25g step)
VTAElevation range:	0 to 10mm
Cartridge/shell balance range:	6 to 38.5g
Headshell weight:	16.45g

Base unit

Dimensions (WxHxD):	497x215x436mm*
Weight:	17 kg

Platter

Dimensions (diameter x height):	Ø315.4x103mm
Weight:	19kg

Motor unit

Dimension (WxHxD):	180x137x450mm*
Weight:	9kg

Power supply unit

Dimensions (WxHxD):	445x131x370mm*
Weight:	18kg

General

Power:	120V AC 60Hz 220V AC 50Hz
Power consumption:	8W
Standby power consumption:	0.4W

*including protrusions

Please note that not all models are available in every country. Design and specifications subject to change without notice. ©2022 ESOTERIC COMPANY. All Rights Reserved. All text, images, graphics and other materials on this brochure are subject to the copyright and other intellectual property rights of ESOTERIC COMPANY. These materials shall not directly or indirectly be published, reproduced, modified or distributed in any medium. ESOTERIC is a trademark of TEAC Corporation, registered in the U.S. and other countries. Grandioso is a trademark of TEAC Corporation. All other brand or product names are trademarks or registered trademarks of their respective holders.

ESOTERIC COMPANY

1-47, Ochiai, Tama-shi, Tokyo JAPAN 208-8530
<https://www.esoteric.jp/en>

